



## Pipelines & LNG - Onshore

# Low Voltage & Control Cables

IEC 60502-1

**Cu/XLPE/PVC or LSZH 0,6/1 kV**

**Cu/XLPE/PVC or LSZH/SWA/PVC or LSZH 0,6/1 kV**

Power cables 0,6/1 kV. Flame retardant, low smoke, halogen free (only LSZH version). Armoured/unarmoured. Design option with insect repellent/rodent protection; Arctic Grade design option: all available on demand.

### APPLICATION

Low Voltage & Control cables are used for fixed installations of power supply and control applications. Prysmian offers a wide range of LV & Control cables with diverse design options depending on the reference standards and customer requirements.

### STANDARDS & APPROVALS

**IEC 60502-1** Design guidelines

**IEC 60332-1-2** Flame retardance

**IEC-60332-3-22 or 24** Fire retardance

on request

**IEC-60754-1 /...-2** Halogen free properties

**IEC-61034-1 / 2** Smoke emission properties

on request

**CSA 22.2 n. 38/95 or IEC 60811**

Cold bend/impact test at low temperature

### DESIGN & CONSTRUCTION

#### 1 CONDUCTOR

**Cu**

Annealed copper conductor according to IEC 60228 cl. 2 (or cl. 5 on request) from 1.5 to 630 mm<sup>2</sup>, single core, three cores, multicore

#### 2 INSULATION

**XLPE**

#### 3 BEDDING/INNER COVERING

(only armoured versions)

**PVC or LSZH**

#### 4 ARMOURING

(only armoured versions)


**SWA**

Steel Wire Armour (Double Steel Tape available on demand, aluminium for single core)

#### 5 OUTER SHEATH

**PVC or LSZH**

Hydrocarbon resistant option available on demand

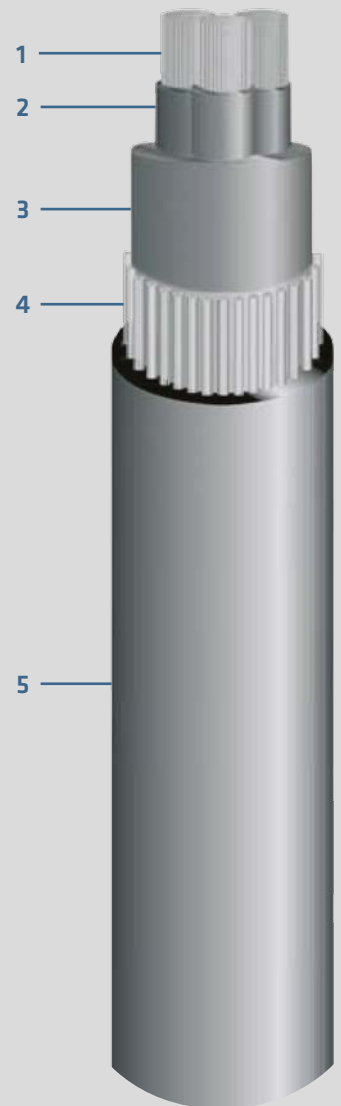

#### CONTACT INFO:

[prysmianoilandgas@prysmiangroup.com](mailto:prysmianoilandgas@prysmiangroup.com)

[www.prysmiangroup.com/contact-us](http://www.prysmiangroup.com/contact-us)



## Oil & Gas - Cable Solutions

## Pipelines & LNG - Onshore

# Low Voltage & Control Cables

IEC 60502-1

### PERFORMANCES/RATINGS

#### FIRE BEHAVIOUR



IEC 60332-1-2  
IEC 60332-3-22 or 24

#### CHEMICAL RESISTANCE



STANDARD (PVC)  
GOOD (LSZH)

#### IMPACTS



GOOD  
EXCELLENT (armoured only)

#### SMOKE DENSITY, CORROSIVITY AND TOXICITY




LOW EMISSION  
(only LSZH version)

#### MIN. INSTALLATION TEMPERATURE



-5 °C (PVC)  
-15 °C (LSZH)  
(-40°C for Arctic Grade)

#### MAX OPERATING TEMPERATURE



+90 °C

#### SHORT CIRCUIT TEMPERATURE



+250 °C

### QUALITY & TESTING

Prysmian has a built-in multi-step quality assurance program, covering the production process from cable design and raw material purchases to final inspection and testing documentation.

The ISO 9001 quality system of Prysmian Group (together with ISO 14001 and OHSAS 18001) has been assessed, approved and is currently audited by SGS.

This product information sheet is provided for reference only.

Please consult the factory or your representative to confirm all engineering information or refer to the related catalogues available in the local countries website.

CONTACT INFO:  
[prysmianoilandgas@prysmiangroup.com](mailto:prysmianoilandgas@prysmiangroup.com)  
[www.prysmiangroup.com/contact-us](http://www.prysmiangroup.com/contact-us)

**Prysmian**  
Group