


Deadbreak Cable Adapters

DESCRIPTION

The Deadbreak Cable Adapters are used to adapt various medium voltage cable sizes to a standardized housing size. The adapter is installed onto the prepared cable and the associated housing is pushed over the cable adapter. The adapters are designed to maintain an interference fit with the inside diameter of the housing cable entrance. Care must be taken when sizing an adapter to the cable insulation diameter.

FEATURES

- EPDM Injection Molded
- Peroxide Cured
- Locating Step Included
- Designed per the requirements of IEEE 386

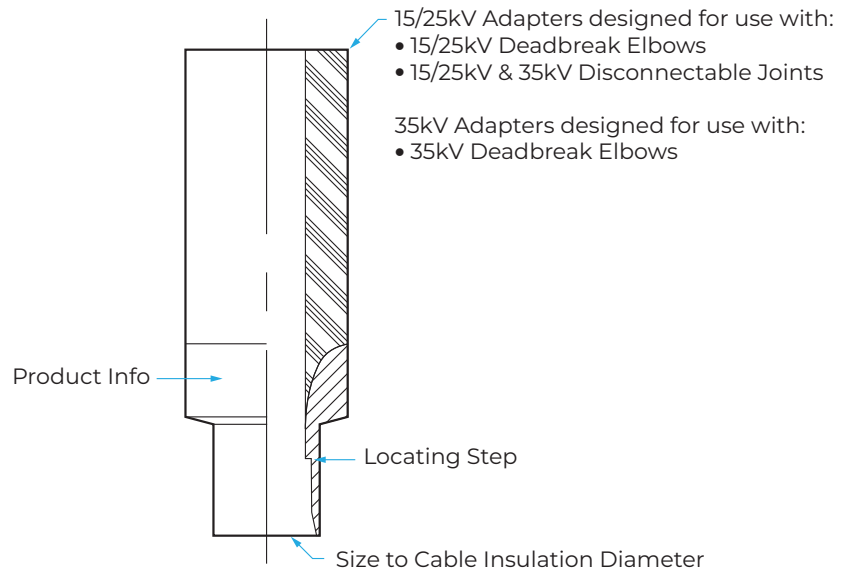

PRODUCT OFFERING

15/25kV CABLE ADAPTERS		
Catalog ID	in	mm
25DBCA-E	0.530 – 0.675	13.46 – 17.15
25DBCA-F	0.640 – 0.820	16.26 – 20.83
25DBCA-G	0.760 – 0.950	19.30 – 24.13
25DBCA-H	0.850 – 1.050	21.59 – 26.67
25DBCA-J	0.980 – 1.180	24.89 – 29.97
25DBCA-K	1.090 – 1.310	27.69 – 33.27
25DBCA-L	1.180 – 1.465	29.97 – 37.21
25DBCA-M	1.370 – 1.630	34.80 – 41.40
25DBCA-N	1.515 – 1.780	38.48 – 45.21
25DBCA-P	1.725 – 1.935	43.82 – 49.15

35kV CABLE ADAPTERS		
Catalog ID	in	mm
35DBCA-H	0.850 – 1.050	21.59 – 26.67
35DBCA-J	0.980 – 1.180	24.89 – 29.97
35DBCA-K	1.090 – 1.310	27.69 – 33.27
35DBCA-L	1.180 – 1.465	29.97 – 37.21
35DBCA-M	1.370 – 1.630	34.80 – 41.40
35DBCA-N	1.515 – 1.780	38.48 – 45.21
35DBCA-P	1.725 – 1.935	43.82 – 49.15
35DBCA-Q	1.900 – 2.120	48.26 – 53.85
35DBCA-R	2.000 – 2.235	50.80 – 56.77

