
Prysmian Downhole Technology (PDT)
Protectors

Exploration & Production - HD Protector

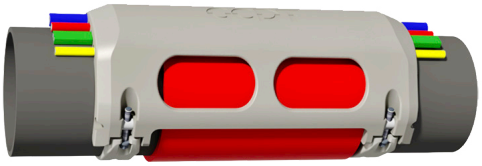

Specialty: HD Protector

Protectors are designed to ensure that all control lines and cables are protected for the full length of the production string, thus reducing the risk of damage to cable, control line, or flatpacks. PDT's Protector portfolio includes clamping and cable protection solutions to protect cables from lateral, axial, and rotational loading in downhole applications. In addition to our standard cross-coupling range, PDT designs application specific solutions for demanding situations.

Application

The Heavy Duty (HD) Protector is a robust all cast protector designed for arduous service. Typically utilized in harsh environments and deepwater applications where physical robustness and strength are critical. The HD design incorporates features that provide load ratings greater than standard protectors. A key feature of this protector is the interlocking fastening mechanism that prevents shear stresses from being applied to the bolts by dispersing impact related forces to the cast body. The HD has been designed as a universal protector to cover a wide range of tubing connections and accommodate a multitude of line configurations.

Standards & Approvals

All parts comply with NACE Standard MR0175 / ISO 15156

Quality & Testing

- Manufactured in accordance with standard Inspection and Quality Plans
- Design Validation Testing
  - Axial, Lateral, Rotational Testing
- Factory Acceptance Testing
  - Visual Inspection
  - Make Up / Fit Test
  - Dimensional Inspection
  - Gap Verification
  - Drift Verification
  - Torque Test

Design & Construction

- All cast - no welded parts
- One-piece assembly with captive fasteners
- No loose parts
- Interlocking Straps
- Hex or Allen Socket Bolt Option
- Chamfered ends to prevent hang up
- Supports minimum of 100' of downhole cable, control line, and flatpack weight
- Side ribs with centralized support pillars
- Quick and Easy to install
- Reusable
- Custom designs to meet application

Materials

- Carbon Steel
- 316 SS
- 13Cr
- 25Cr
- Super Duplex

Axial Loading

- 75 Ton

Lateral Loading

- 75 Ton

Rotational Loading

- 3 Ton

Common Tubing Sizes

- 2-3/8”
- 2-7/8”
- 3-1/2”
- 4-1/2”
- 5”
- 5-1/2”
- 6”
- 6-5/8”
- 7”

For more information about Prysmian Downhole Technology products and services, please contact Walter Schomburg, Sales Manager, at walter.schomburg@prysmian.com

Prysmian
4 Tesseneer Drive, Highland Heights, KY 41076
na.prysmian.com
SPL-PDT-0008 1126